




Single-phase Phasemeter



DL 2109T18

Moving coil meter with transducer for single-phase ac.
Range: 1.5-6 A / 80-250 V
Scale amplitude: 240° x (0.5 cap – 1 – 0.5 ind)
Power supply: 24 Vac


Transformer

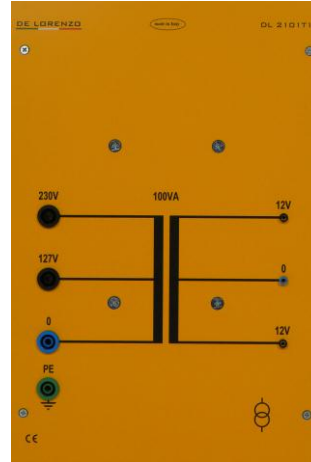

DL 2101T13

Primary: 127-220 V
Secondary: 2x12 V
Rated power: 100 VA

Three-phase Phasemeter

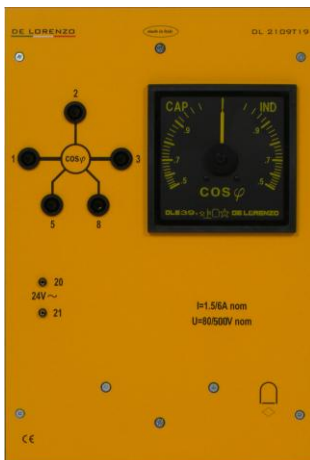

DL 2109T19

Moving coil meter with transducer for three-wire three-phase systems with balanced load.
Range: 1.5-6 A / 100-500 V
Scale amplitude: 240° x (0.5 cap – 1 – 0.5 ind)
Power supply: 24 Vac

Resistive Load



DL 1017R

Single or three-phase resistive step-variable load.
Max. power: 3 x 400 W
Max. voltage: 220/380 V Δ / Y