



# ELECTRICAL CIVIL INSTALLATIONS



## Stand-by Battery



**DL 2101T29**

Sealed, rechargeable battery.  
Capacity: 12 V, 1.8 Ah.

## Fire, Intrusion and Gas Alarm Control Unit




**DL 2101T30/40**

Eight multifunction programmable input control unit for fire, intrusion and gas detection.

- 1 anti-sabotage line, 24 h
- 5 outputs at 12 V for power supplying the sensors
- 1 output at 14 V for charging the battery
- 2 programmable alarm relays

Power supply from mains.

## Smoke Detector

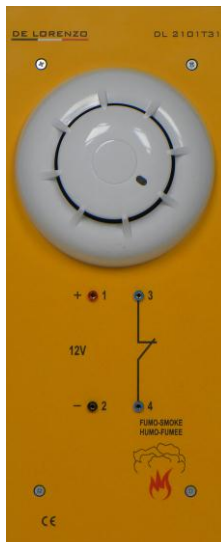

**DL 2101T31**

Photo-optical smoke detector with relay output. Typical protected area: 80 m<sup>2</sup>. Connection through 4 wires, memory LED, output for remote memory LED. Absorption while in operation 60 µA. Power supply: 12 Vdc.

## Thermal Detector



**DL 2101T32**

Combined thermo velocimetric and fixed 60°C conventional temperature detector. Typical protected area: 40 m<sup>2</sup>. Connection through 2 wires, memory LED, output for remote memory LED. Power supply: 12 Vdc.