




Three Pilot Lamps



DL 2102T03

Three signalling LED lamps, red, yellow and green.


Contactor

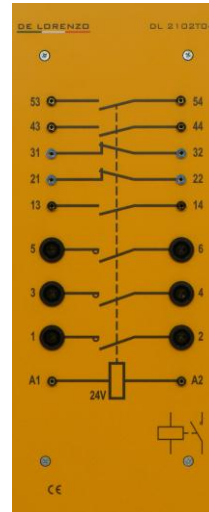

DL 2102T04

It operates as a three-pole power switch through the use of an electromagnet. Provided with 3 NO power contacts and 1 NO auxiliary contact, the module also contains 4 additional auxiliary contacts, 2 NO and 2 NC. Coils voltage: 24 Vac, 50/60 Hz
Isolating rated voltage: 660 Vac
Thermal rated current: 20 A
Thermal rated current of the auxiliary contacts: 10 A.


Thermal Relay

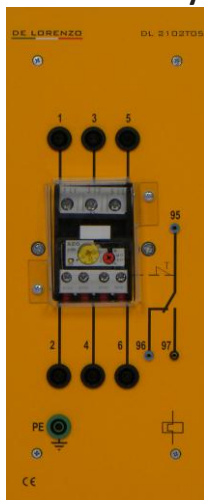

DL 2102T05

Three-phase protection against overload and phase loss through a high sensitivity differential device with protection against faulty starting. Compensation of the variation of the ambient temperature between -25°C and $+60^{\circ}\text{C}$. Isolating rated voltage: 690 V
Thermal rated current of the auxiliary circuit: 10 A

Time Relay

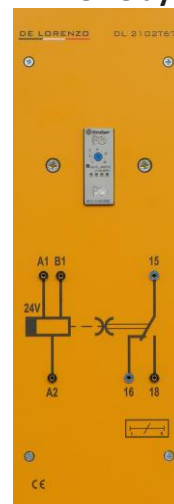

DL 2102T67

Multi-voltage and multifunction electronic timer, delayed at the excitation and at the de-excitation. Power supply: from 12 to 240 Vac, 50/60 Hz
Timer selection from: 0.1 to 2 sec., 1 to 20 sec., 0.1 to 2 min., 1 to 20 min.
Resettlement time: less than 50 milliseconds.
Full scale adjustment accuracy: $\pm 5\%$