




ELECTRICAL MEASUREMENTS



Synchronoscope

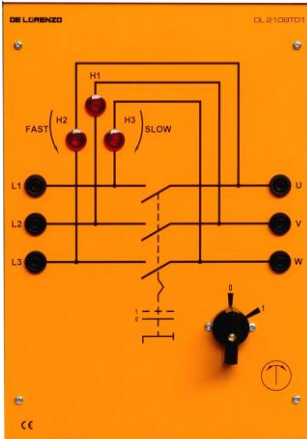


DL 2109T01

Indicator for phase comparison and parallel operation with bright-dark lamps.

Rated voltage:
3 x 380 V/220 V

Phase Sequence Indicator

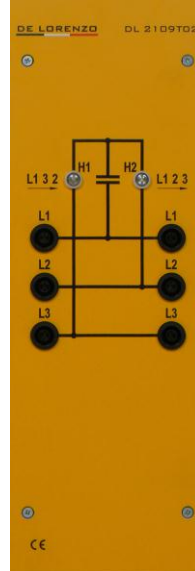


DL 2109T02

Indicator of the phases cycle through signalling lamps.

Rated voltage:
3 x 380 V/220 V

Static Rectifier

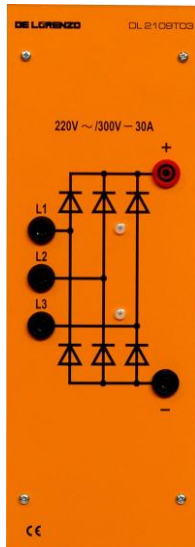

DL 2109T03

Three-phase Graetz bridge.
Power supply: 220 Vac
Rectified output:
300 V, 24 A

Variable Resistance



DL 2109T04R

Rheostat, 680 Ω , 0.47 A