




ELECTRICAL MEASUREMENTS



Double Change-Over Switch

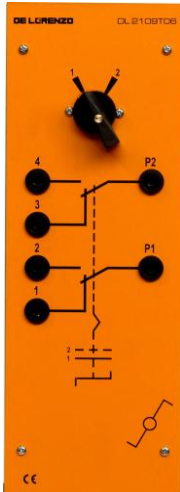

DL 2109T06

Two pole two-way commutator, 380 V, 16 A.

Micro Ammeter



DL 2109T10

Moving coil, zero centered, with sensitivity reducer.
Range: 50/0/50 μ A
Reducer: 1/10
Scale amplitude: 240°

Milliammeter



DL 2109T11

Moving coil with rectifier.
Range: 250/500 mA, DC and AC
Scale amplitude: 240°

Ammeter



DL 2109T12

Moving coil with rectifier.
Range: 2.5/5 A, DC and AC
Scale amplitude: 240°