



Double frequencymeter



DL 2109T16/2

Measurement device, provided with two separate instruments, for comparing the frequencies of two voltages.

Range: 2 x (45 ... 65) Hz

Class of accuracy: 1.5

Double voltmeter




DL 2109T17/2

Measurement device, provided with two separate instruments of the moving coil type with rectifier, for comparing two voltages.

Range: 2 x 250/500 V with switch

Class of accuracy: 1.5

Single-phase current transformer

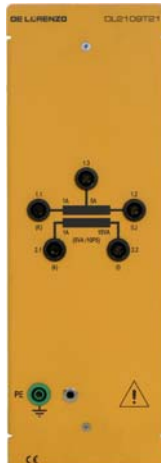

DL 2109T21

Current transformer for measuring and protection purposes.


Rated primary currents: 5/1 A

Rated secondary current: 1 A

Performance and class: 15 VA / 1 - 5 VA / 10P5

Frequency: 50 - 60 Hz

Three-phase current transformer

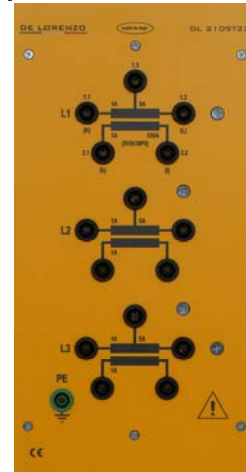

DL 2109T22

Three single-phase current transformers for measuring and protection purposes.

Rated primary currents: 5/1 A

Rated secondary current: 1 A

Performance and class: 15 VA / 1 - 5 VA / 10P5

Frequency: 50 - 60 Hz