




Moving iron voltmeter

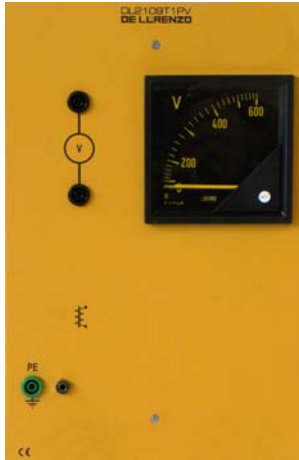

DL 2109T1PV

Electromagnetic meter for AC and DC measurements.
 Scale: 30 divisions
 The scale is made open and reasonably uniform down to about 20 per cent of the full-scale reading.
 Range: 600 V
 Accuracy class: 1.5


Moving iron voltmeter



DL 2109T3PV

Electromagnetic meter for AC and DC measurements.
 Scale: 50 divisions
 The scale is made open and reasonably uniform down to about 20 per cent of the full-scale reading.
 Range: 125 – 250 - 500 V
 Range changeover switch.
 Accuracy class: 1.5


Synchronization indicator

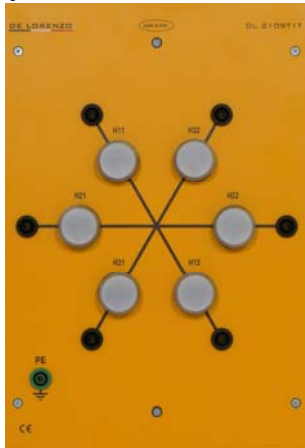

DL 2109T1T

Synchronization indicator for qualitative indication of the phase relationship between mains and voltages of the generator.
 3 series of 2 lamps each, 220 V:
 H11 - H12, H21 - H22 and H31 - H32

Phase sequence indicator

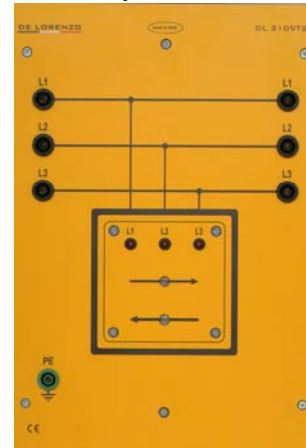

DL 2109T2T

Sequencyscope to establish the order of the cyclic direction of the phase.
 Operating voltage: 90 to 660 V
 Frequency: 45 to 1000 Hz